

20 kg Self-contained Ice Machine

Complete Range: SCH 20 - SCH 30 - SCH 40 -SCH 50 - SCH 65 - SCH 90 - SCH 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290



Internal bin capacity




6 kg of Ice

300 cubes

Type of ice



34 mm



Machine dimensions

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Net size WxDxH

333 x 457 x 599 mm

Net weight

28 kg

Shipping size WxDxH

400 x 530 x 690 mm

Shipping weight

33 kg

Technology and Certifications



SIMAG

Via Lainate 31 - 20010 Pogliano Milanese - (Milano) Italy

Tel. +39.02.93960323

e-mail: sales@simag.it


www.simag.it

SCH 20



20 kg Self-contained Ice Machine

Complete Range: SCH 20 - SCH 30 - SCH 40 -SCH 50 - SCH 65 - SCH 90 - SCH 105

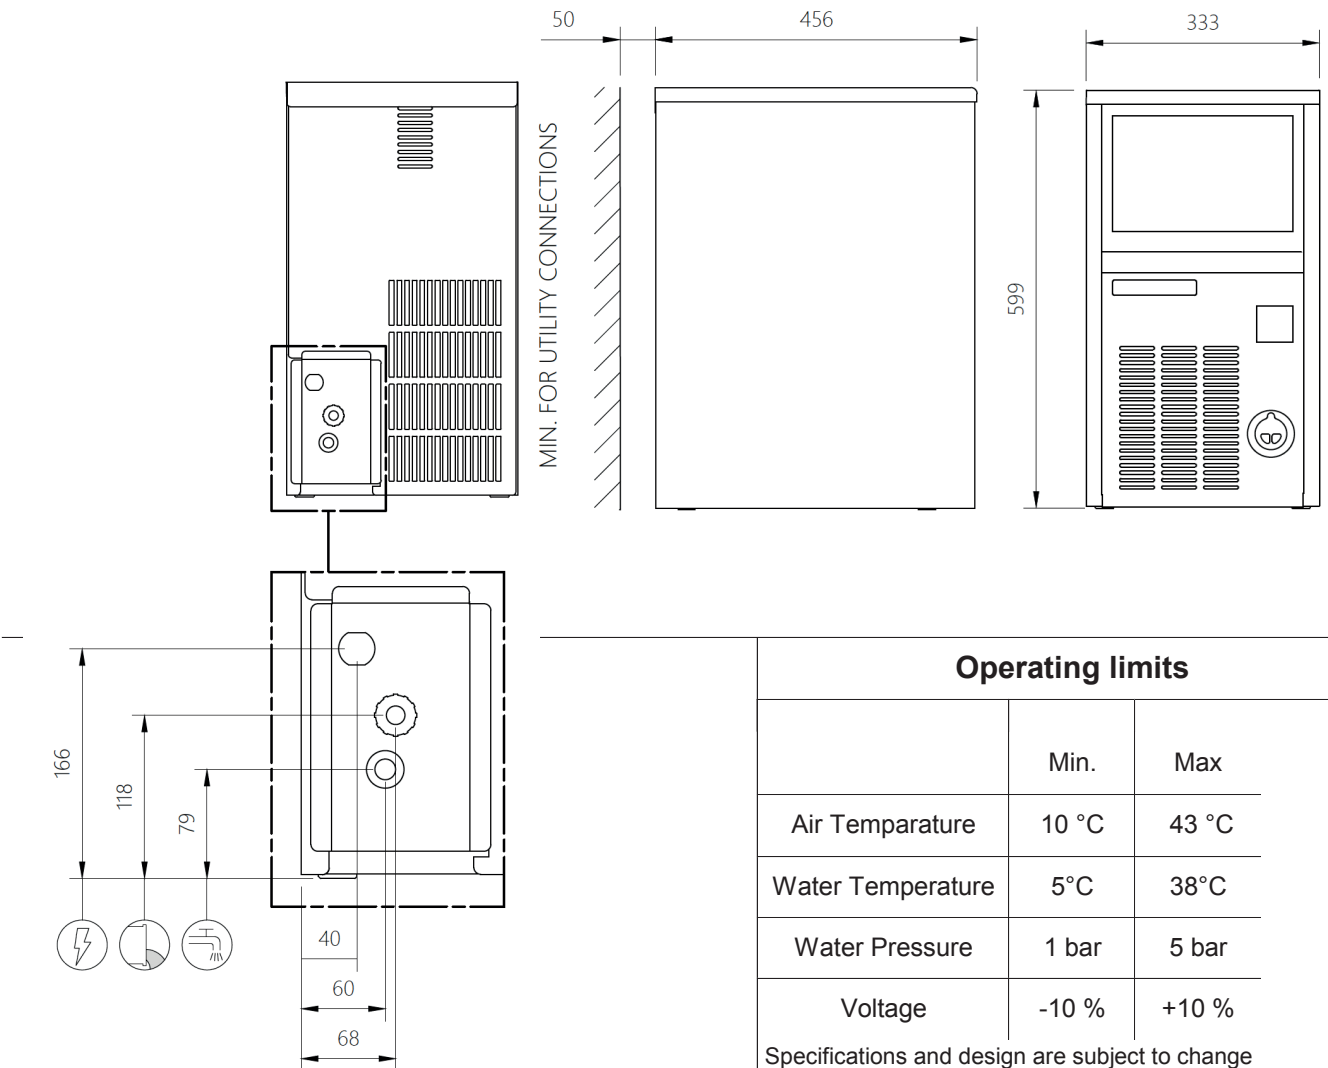

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
SCH 20 A	230/50/1	20	18,5	250	R290	0,075	10	32,3	4,2	3,9
SCH 20 W	230/50/1	20	18,5	250	R290	0,100	10	23,1	13,6	36,9

(**) Water Consumption: at 32°C Air and 21°C Water

(*) Power Input: at 43°C Ambient Temperature